



SLC DL04 SURFACE X2 WH 1435TED 2700K CRI90 IP21 36°

03/06/2024

SLC1228



Product description

The DL04 Surface X2 is a square, tiltable surface-mounted luminaire in a double version and modern design. Bring the classic LED spot look to rooms where recessing into the ceiling is not possible. The tiltable and rotatable spots, the timeless design, and the good glare control UGR<22 ensure a pleasant and flexible lighting experience.

The SLC DL04 Surface X1 is a square, tiltable and rotatable surface-mounted luminaire with a modern design. Bring a stylish yet timeless look to rooms where recessing into the ceiling is impossible. The excellent glare control (UGR<22) ensures a pleasant lighting experience.

- Tilttable (25°)
- CRI Ra>90
- UGR<22
- Dimmable (TED) driver included
- Recommended dimmer: SLC SmartOne (S24019)
- Easy mounting with Slidelock - no visible screws
- Quick connection box with Loop-in / Loop-Out



Technical data

Suitable for surface mounting	Yes
Adjustability	Swivelling
With light source	Yes
Surface protection	Powder coating
Material cover	Plastic, transparent
Nominal current	400 - 400 Milliampere
With control gear	Yes
Reflector	High-gloss
Light sharing	Symmetric


Suitable for ceiling mounting	Yes
Lamp type	LED not exchangeable
Housing material	Aluminium
Housing colour	White
Voltage type	AC
Type of control gear	LED operating device current-controlled
Dimming phase cut-off	Yes
Light distributor	Reflector
Reflector colour	Silver






Beam angle	Medium beam 21-40°
Energy efficiency class of the light source a	F
Protection class	I
Max. system power	15,1 Watt
Colour temperature	2700 - 2700 Kelvin
Rated luminous flux according to IEC 62722-	1435 Lumen
Luminous flux adjustable	Continuously variable
Width	135 Millimetre
Length	224 Millimetre
Number of poles	2
Connectable conductor cross section	1,5 - 2,5 Square millimetre
Luminaire efficacy	96 Lumen/Watt
Beam angle fixed	36
Operating temperature (Ta)	-20°C ~ +45°C
Brand	SLC
Produced by	The Light Group

Light outlet	Direct
Degree of protection (IP)	IP21
Rated ambient temperature according to IEC	-20 - 45 Degrees celsius
Colour of light	White
Colour rendering index CRI	90-100
Colour of light adjustable	No
Beam angle adjustable	No
Height/depth	60 Millimetre
Type of wiring	Suitable for through wiring
Conductor cross section	0,35 Square millimetre
Connection type	Push-in clamp
Colour consistency (McAdam ellipse)	SDCM3
Glare (UGR)	UGR<22
Control type	Trailing edge
GTIN	7070938065467

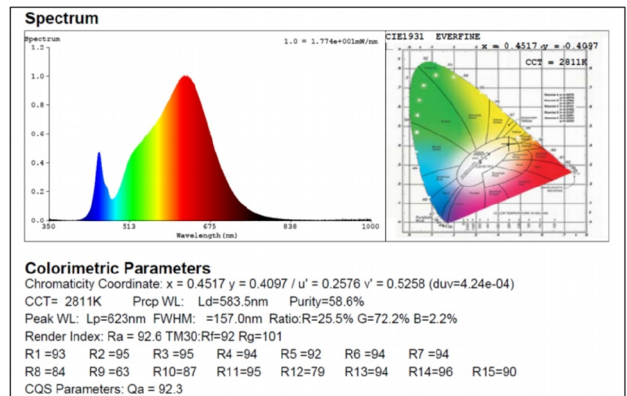

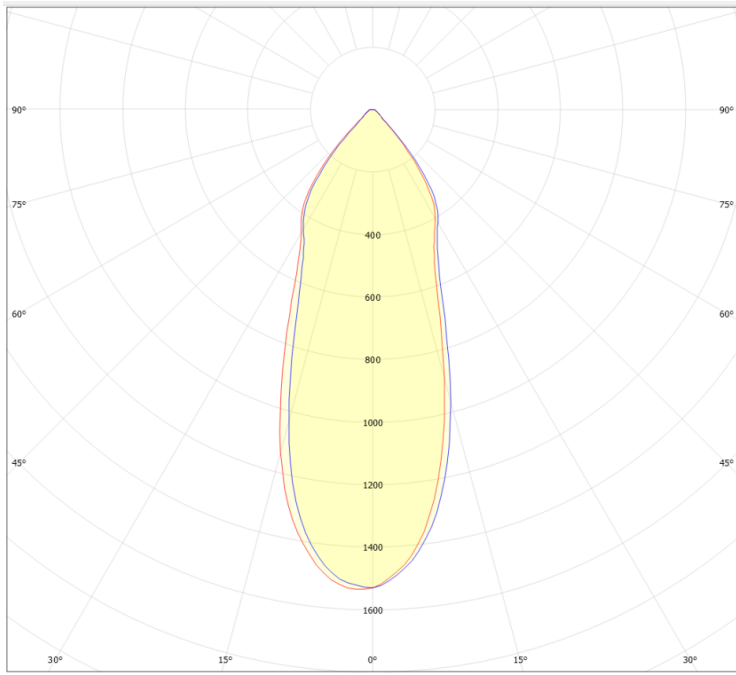


cd/km
 — C0/C180
 — C90/C270



Scandinavian Lighting Concept

SLC1228

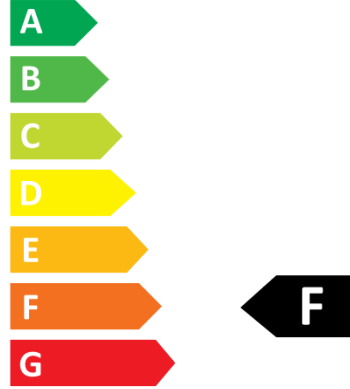

15 kWh/1000h



2019/2015

