



SLC DL04 SQUARE X2 R83X2 BL TED 2700K CRI90 IP54 36°

14/03/2023

SLC1245



Product description

The SLC DL04 Square X2 is a square, tiltable (25°) recessed luminaire in a double version. Experience pleasant light with low glare and a good colour rendering index.

The SLC DL04 Square X2 is a square, tiltable (25°) recessed luminaire in a double version. Experience pleasant light with low glare and a good colour rendering index.

Dimmable (TED) driver included
 Recommended dimmer: SLC SmartOne (S24019)
 UGR<22
 CRI Ra> 90
 Quick connection box with Loop-in / Loop-Out
 16 mm Cable/Tube connection



Technical data

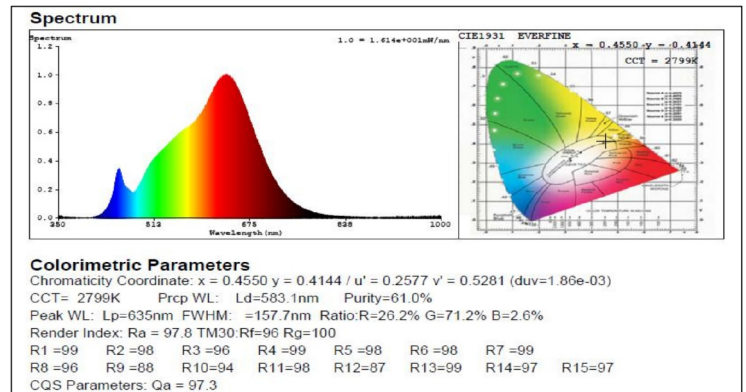
Suitable for built-in mounting	Yes	Suitable for ceiling mounting	Yes
Adjustability	Swivelling	Lamp type	LED not exchangeable
With light source	Yes	Housing material	Aluminium
Surface protection	Powder coating	Housing colour	Black
Material cover	Plastic, transparent	Voltage type	AC/DC
Nominal voltage	220 - 240 Volt	Nominal current	440 - 440 Milliampere
Type of control gear	LED operating device current-controlled	With control gear	Yes
Dimming phase cut-off	Yes	Reflector	High-gloss
Light distributor	Reflector	Light sharing	Symmetric
Reflector colour	Silver	Beam angle	Medium beam 21-40°





Light outlet	Direct
Degree of protection (IP)	IP54
Rated ambient temperature according to IEC	-20 - 45 Degrees celsius
Colour of light	White
Colour rendering index CRI	90-100
Colour of light adjustable	No
Beam angle adjustable	No
Height/depth	56,4 Millimetre
Built-in width	183,5 Millimetre
Built-in length	83 Millimetre
Type of wiring	Suitable for through wiring
Conductor cross section	0,35 Square millimetre
Connection type	Push-in clamp
Colour rendering index (CRI/Ra)	90
Tilt-able (°)	25
Cut-out hole (Ø: mm)	2x83
Dimmable	Yes
Dimming range	1-100%
GTIN	7070938065634

Energy efficiency class of the light source a	F
Protection class	II
Max. system power	20 Watt
Colour temperature	2700 - 2700 Kelvin
Rated luminous flux according to IEC 62722-	1210 Lumen
Luminous flux adjustable	Continuously variable
Width	190 Millimetre
Length	95 Millimetre
Built-in height/depth	56 Millimetre
Built-in diameter	166 - 166 Millimetre
Number of poles	2
Connectable conductor cross section	1,5 - 2,5 Square millimetre
Colour consistency (McAdam ellipse)	SDCM3
Beam angle (°)	36
Glare (UGR)	UGR<22
Dimming method	Trailing edge
Type of control signal	Amplitude modulation (AM)
Brand	SLC
Produced by	The Light Group

CREE-CXA1507-4-011213-3719005-2700K-200mA







 **ENERG** 


Scandinavian Lighting Concept
SLC1245


A 


B 

C 


D 

E 

F  

G 

17
kWh/1000h



2019/2015

